

آموزش آپدیت اکسس پوینت

نام دستگاه : Netis WF2419D


اینترنت های روستایی ساتیا

گروه پشتیبانی ساتیا

1. برای ورود به تنظیمات اصلی مودم ابتدا در مرورگر خود آی پی **192.168.1.1** را وارد کنید (مطابق تصویر زیر)


توجه : تصویر زیر قسمت مقدماتی تنظیمات دستگاه شما می باشد

2. برای ورود به تنظیمات پیشرفت در بالای تصویر گزینه **Advanced** را بزنید .

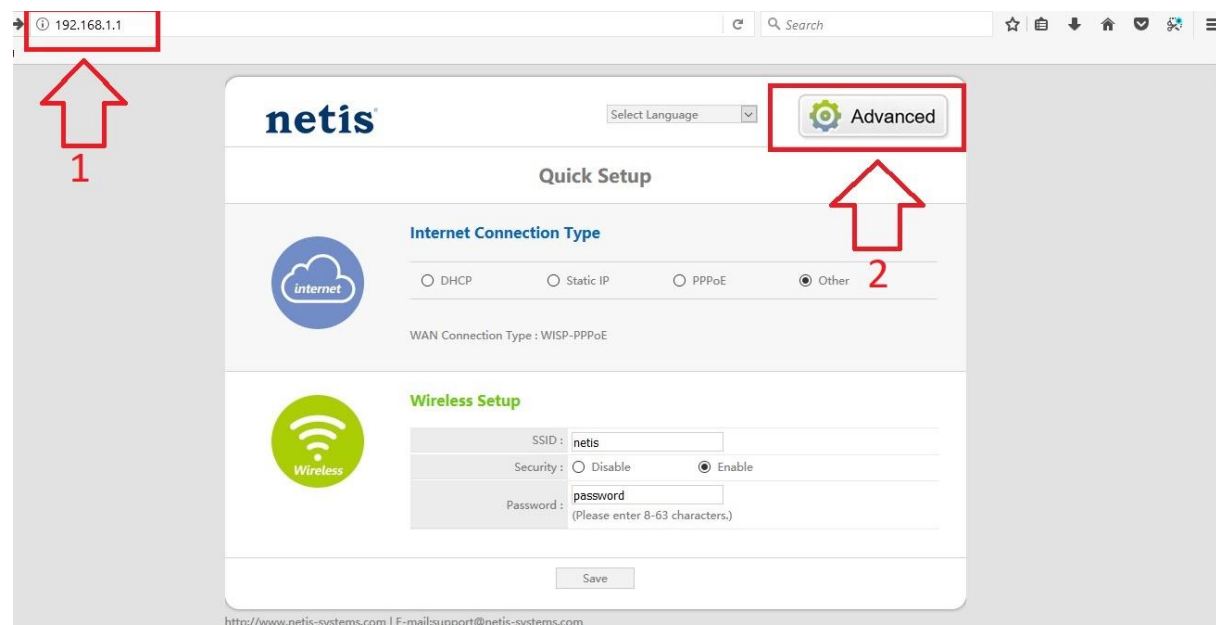


3. در این قسمت گزینه **System Tools** را باز کنید و از زیر مجموعه گزینه **Firmware Upgrade** را انتخاب کنید .


4. روی دکمه **Browse** کلیک کرده و مسیر فایل ذخیره شده آپدیت را انتخاب کنید .

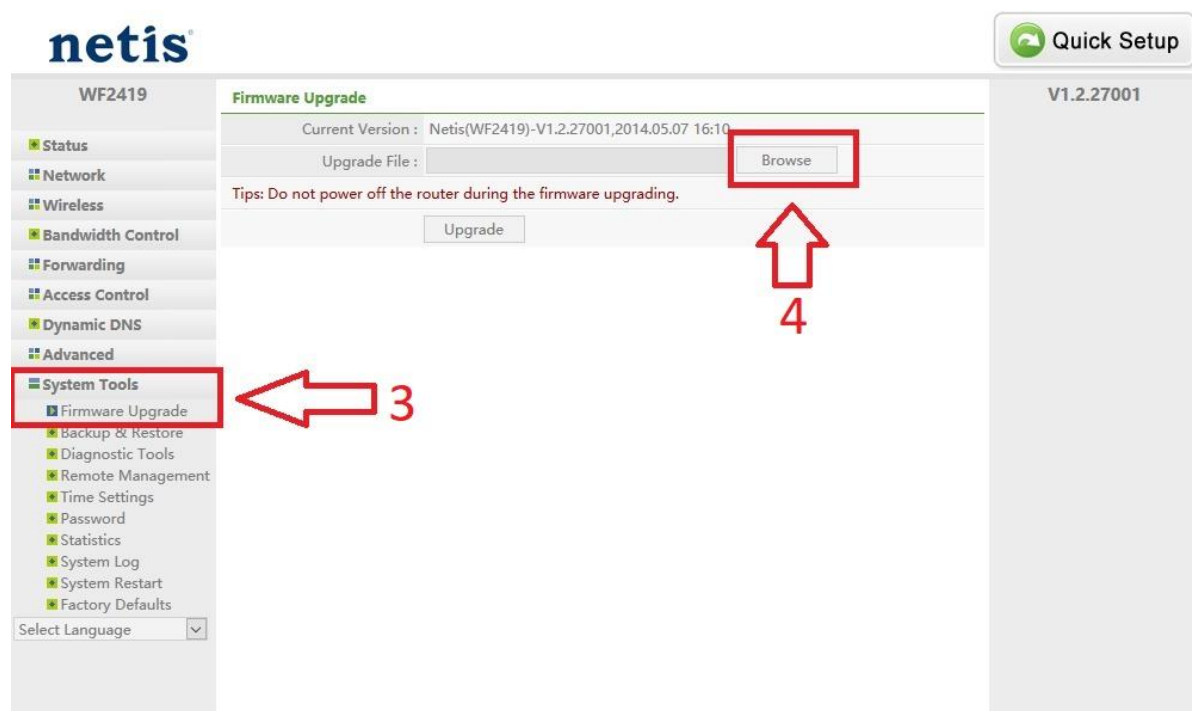

5. بعد از انتخاب فایل آپدیت روی گزینه **Open** کلیک کنید

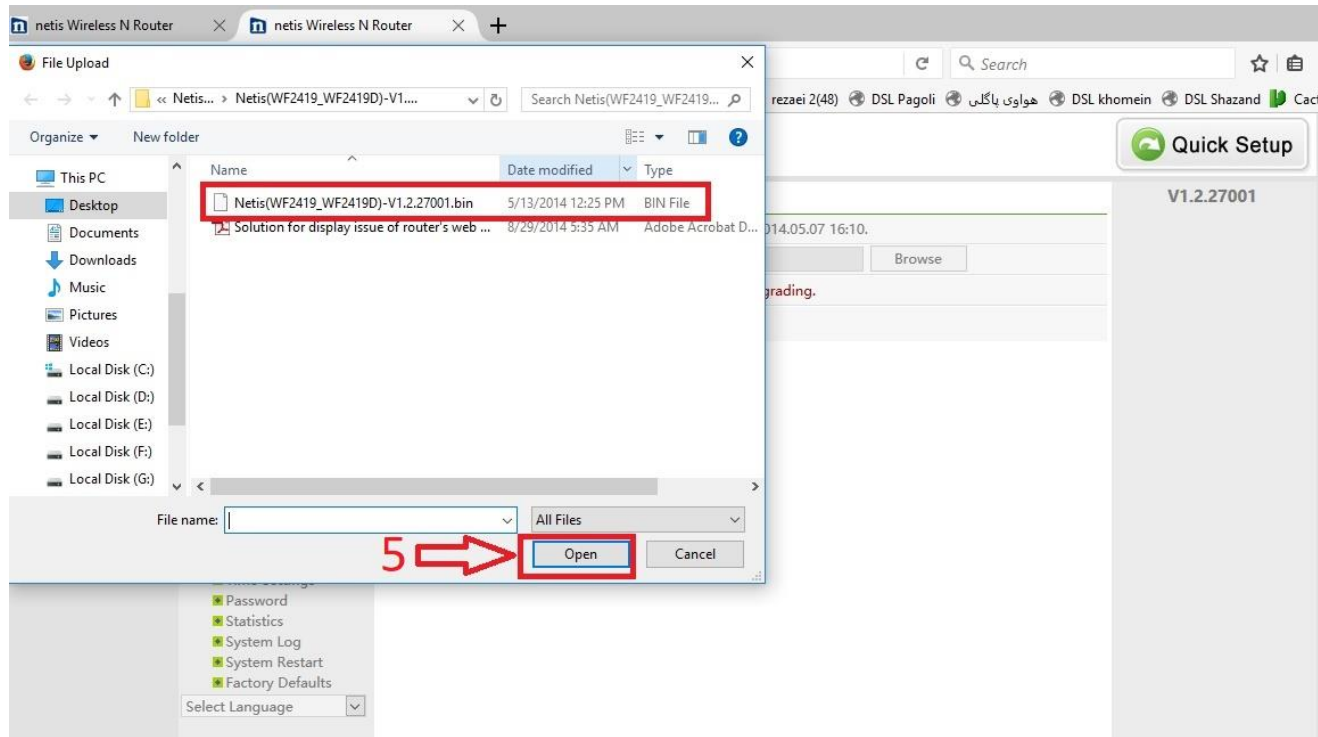

6. بعد از اینکه فایل انتخاب شد روی دکمه Upgrade کلیک کنید .

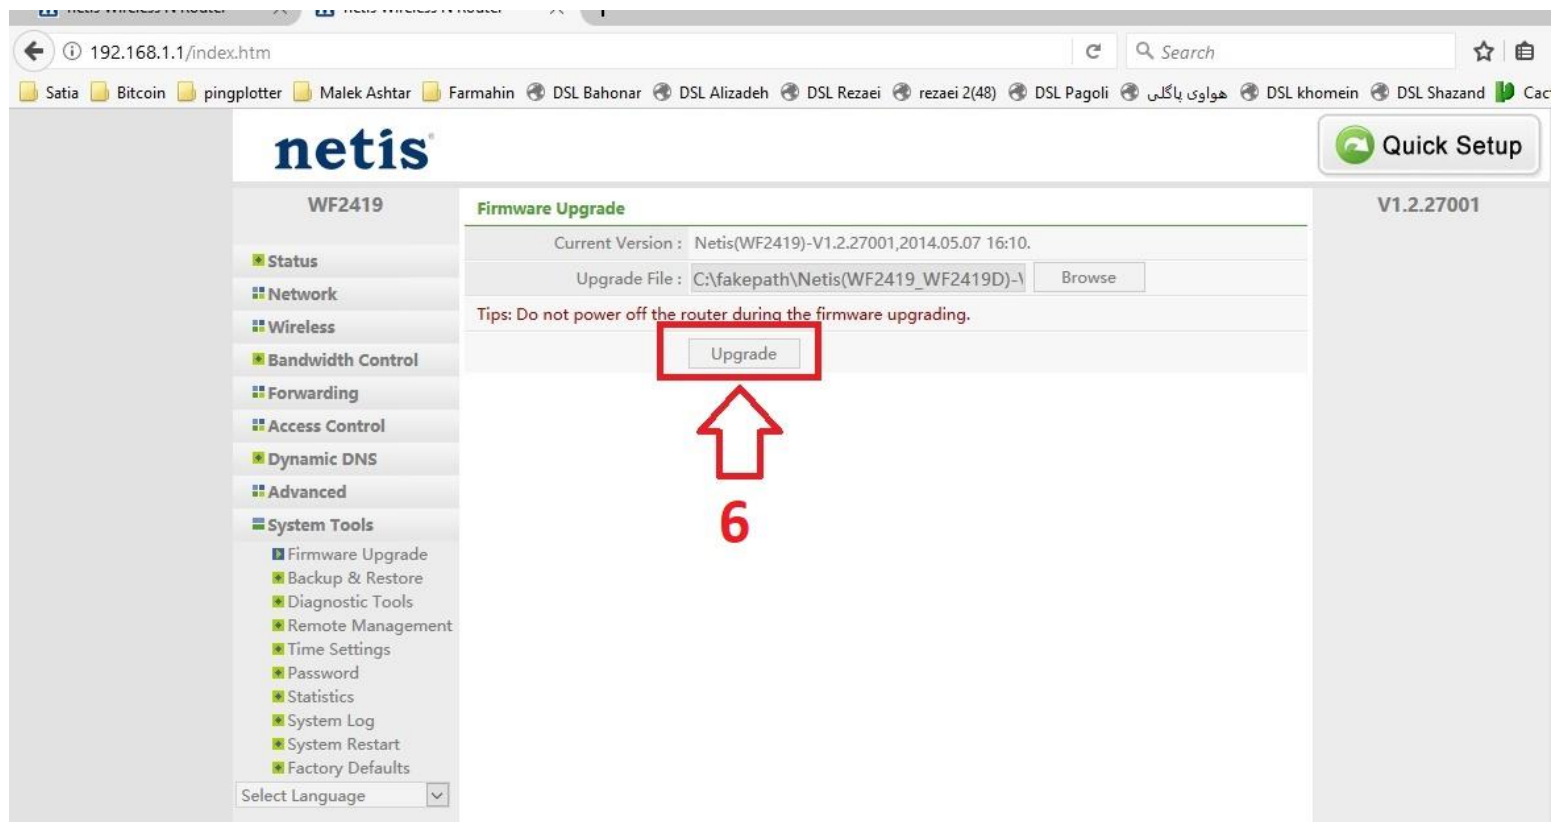

The screenshot shows the Netis WF2419 router's web interface. The browser address bar displays '192.168.1.1/index.htm'. The page title is 'netis'. On the right, there is a 'Quick Setup' button and the current firmware version 'V1.2.27001'. The main content area is titled 'Firmware Upgrade' and shows the 'Current Version' as 'Netis(WF2419)-V1.2.27001,2014.05.07 16:10.' and the 'Upgrade File' as 'C:\fakepath\Netis(WF2419_WF2419D)-'. A 'Browse' button is next to the file path. Below this, a tip states: 'Tips: Do not power off the router during the firmware upgrading.' The 'Upgrade' button is highlighted with a red box, and a red arrow points to it from below, with the number '6' written in red below the arrow. A left sidebar contains a navigation menu with categories like Status, Network, Wireless, Bandwidth Control, Forwarding, Access Control, Dynamic DNS, Advanced, and System Tools. The 'System Tools' category is expanded, showing options like Firmware Upgrade, Backup & Restore, Diagnostic Tools, Remote Management, Time Settings, Password, Statistics, System Log, System Restart, and Factory Defaults. A 'Select Language' dropdown is at the bottom of the sidebar.

توجه : مشتریان عزیز تا پایان عملیات بروز رسانی دستگاه را به هیچ وجه خاموش نکنید

The screenshot displays the Netis WF2419 router's web management interface. The top left corner features the 'netis' logo and the model number 'WF2419'. The top right corner has a 'Quick Setup' button and the current firmware version 'V1.2.27001'. A central panel titled 'Firmware Upgrade' is highlighted with a red border, showing a progress bar at 50% completion with the text 'Upgrading now...'. The left sidebar contains a navigation menu with categories like Status, Network, Wireless, Bandwidth Control, Forwarding, Access Control, Dynamic DNS, Advanced, and System Tools. The System Tools section is expanded, listing options such as Firmware Upgrade, Backup & Restore, Diagnostic Tools, Remote Management, Time Settings, Password, Statistics, System Log, System Restart, and Factory Defaults. A 'Select Language' dropdown menu is located at the bottom left of the sidebar.

با تشکر تیم پشتیبانی ساتیا